



KAHLES

# K540i REFINED UNPARALLELED PERFORMANCE.



5-40x56i

Designed for professional long-range shooting, the K540i sets a bold new standard. Its unparalleled field of view provides maximum downrange clarity and enables seamless target transition, essential in fast-paced scenarios.

## PRODUCT HIGHLIGHTS

- ◆ Ergonomic, shooter-specific configurations for optimal control.
- ◆ True 8x zoom with uncompromised optical performance across the entire adjustment range.
- ◆ VISIONFLEX – Revolutionary optical design with a **40%** wider field of view\* and a remarkably generous eyepiece.

## FEATURES



First focal plane



Illuminated reticle



Main tube diameter 36 mm



10 MIL per revolution turrets



Adjustment direction CCW



Top mounted parallax



Windage left or right



EASYREAD



REVOLUTION INDICATOR




ZEROSTOP



TWISTGUARD




VISIONFLEX

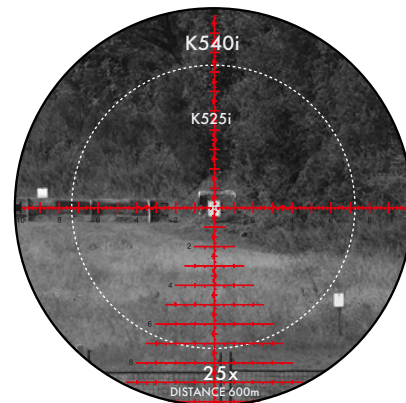


\* Based on the comparison to K525i (2025) at 25x.

## RETICLES



SKMR+



SKMR4+

SCAN TO EXPLORE  
OUR PORTFOLIO.





K A H L E S

## K540i REFINED TECHNICAL DATA

Focal plane	FFP
Magnification	5-40
Objective lens diameter (mm)	56
Field of view (ft/100 yds)	30.6-3.9
Exit pupil diameter (mm)	7.7-1.4
Eye relief (mm)	3.62
Diopter compensation (dpt)	+2/-3
Twilight factor (DIN 58388)	16.7-47.3
Parallax adjustment (m)	20 - ∞
Impact correction / Click E/W	.1 MRAD
Clicks / Revolution E/W	100/100
Adjustment range E/W (MIL)	29/12
Adjustment range E/W (in/100 yds)	104.4/43.2
Adjustment range E/W (MOA)	100/41.3
Adjustment direction	CCW
Windage	left/right
Maintube diameter (mm)	36
Length (in)	16.1
Weight (oz)	39.3
Battery type	CR2032
Objective filter thread	M58 x 0.75
Reticles	SKMR4+ SKMR+
Illumination	
VISIONFLEX	
EASYREAD	
ZEROSTOP	
TWISTGUARD	
Waterproof (ISO9022-8)	
Accessories (optional)	Flip-Up Cover Objective 56 mm / Ocular 52 mm, Sunshield 56 mm, Killflash ARD 56 mm, Parallax Spinner K-1, Throw Lever K-1, Bubble Level 36 mm

SCAN FOR PRICES,  
USER MANUAL &  
SERVICE SECTION.

